


CHATUE CHROME FINISH COMMERCIAL AUTOMATIC TEMPERATURE CONTROL THERMOSTATIC SENSOR FAUCET SPECS

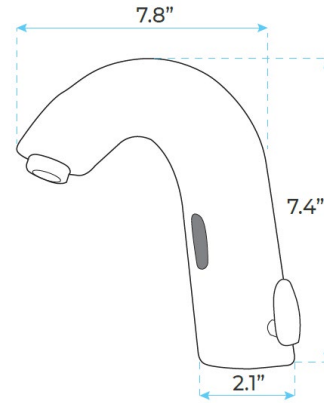

SPECS:

Power: DC:6V(4AA alkaline battery)

AC:220V-240V; 50/60HZ

Flow rate: 1.8 GPM (6.81 L / min)

Detection Zone: Factory set 30cm

Motor valve lifespan: up to 500000 flushes

Battery lifespan: 100000 cycles

Power consumption in static: <math><0.5\text{ mW}</math>

Working Power consumption: 0.5mw

Inductive Opening Time: <math><1\text{ second}</math>

Inductive Closing Time: <math><2\text{ second}</math>

Dia.of inlet / outlet pipe: G1/2"

Flux: $\geq 0.07\text{L/S}$

Temperature: 0.1-50°C

Suitable Water Pressure: 0.3-1.2 MPa

